



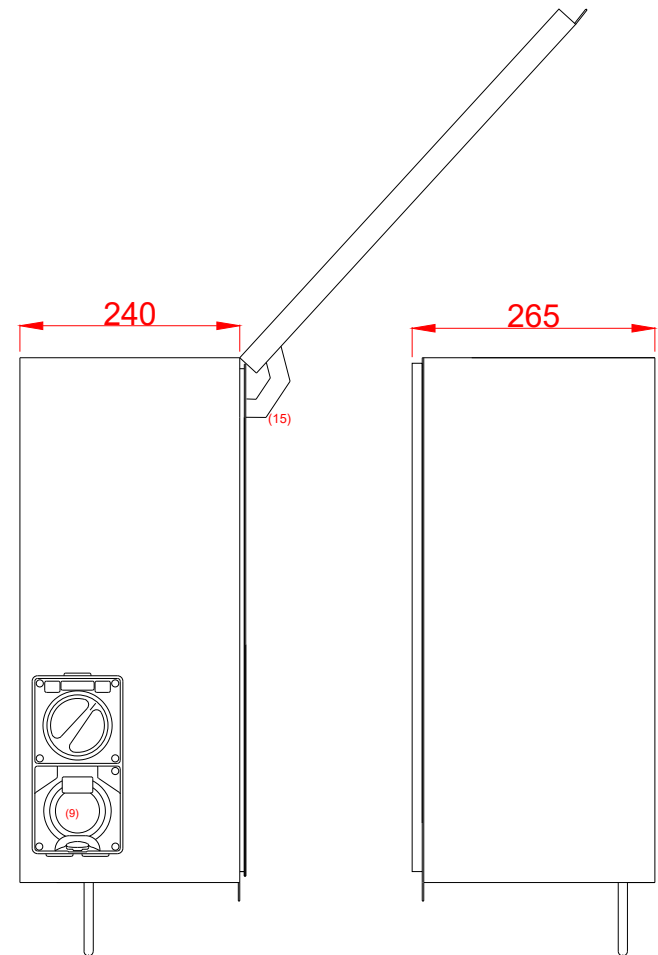


Profile View LHS
Door Open

Profile View RHS
Door Closed

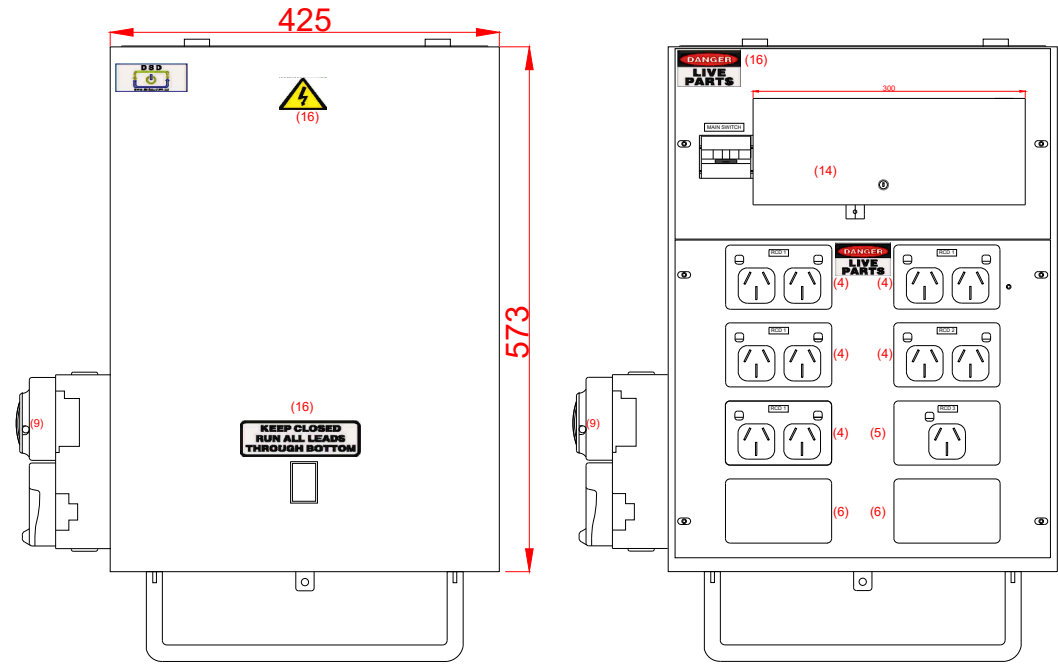


External View

Internal View
Escutcheon On

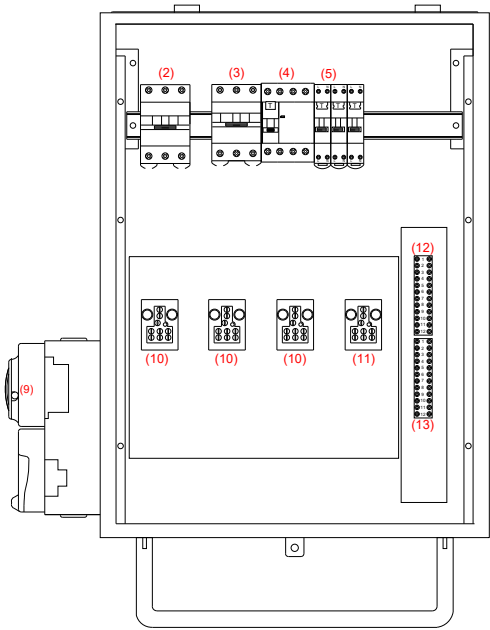

Internal View

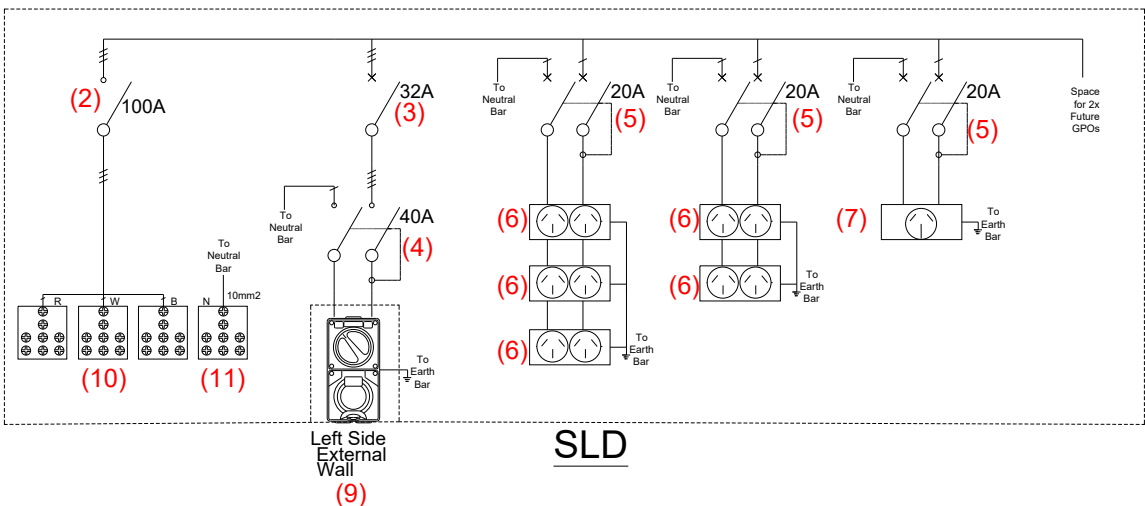

Component Details		Dwg Reference
Enclosure	AS/NZ3012 Galvanised Powdercoated Steel X-15,Orange, IP44, Pad Lockable	(1)
Main Switch	100A 3P Isolator, Wired from Single Pole on Load Side	(2)
MCB	32A 3P, 6kA	(3)
RCD	40A 4P, 6kA	(4)
RCBOs	20A 1P, 6kA, Double Pole	(5)
GPOs	Double Gang,10A Outlet	(6)
GPOs	Single Gang,15A Outlet	(7)
Blank Plates	Blank Plates for Future GPO Positions	(8)
Three Phase Outlet	5 Pin 32A Switched Socket Outlet	(9)
Active Links	Red 4 Hole 165A Sealable Active Link for 25mm Mains	(10)
Neutral Link	Black 4 Hole 165A Sealable Neutral Link for 25mm Mains	(11)
Earth Bar	100A 12 way	(12)
Neutral Bar	100A 12 way	(13)
RCD Cover	Galvanised Powdercoated Steel, X-15 Orange, Pad / Key Lockable	(14)
Door Stay	Galvanised Powdercoated Steel Door Retainer	(15)
Compliance Stickers	AS/NZ 3012 Sticker Kit	(16)

THESE DRAWINGS REMAIN THE PROPERTY OF DSD
AND CANNOT BE REPRODUCED WITHOUT PRIOR WRITTEN CONSENT

AMENDMENTS		
REV:	DATE:	DESCRIPTION:
A	19/10/2020	Temporary Power Boards
B	4/06/2025	Temporary Power Boards

DSD

Design Switchboards & Distribution

Unit 3 6-10 Octal Street
Yatala, QLD, 4207
TEL : 07 5597 1102

Project:

Temporary Power Boards
TPB-3PT5.532

Title: TPB-3PT5.532

Scale: NTS

Date: 19/10/20

Approved:

Document ID: TPB-3PT5.532		Rev: B
---------------------------	--	--------